



## Safety Notes


Before installation, please clean out the pipe which will connect to the faucet, or the mud or dirt in the pipe will block the faucet and result in poor water supply. Make sure the output pressure of cold and hot water meet the requirements of faucet.

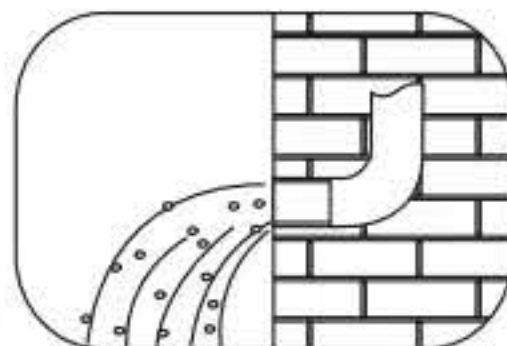


The valve cartridge and other parts of faucet have been justified well by manufacturer, please don't disassemble them by yourself.

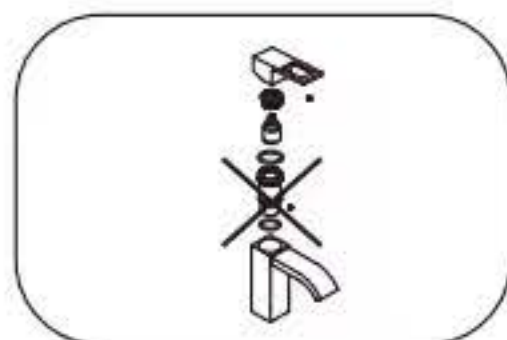


Connect the stainless steel knitted hose to the faucet body, make sure the hot water port is on the left and the cold water port is on the right.

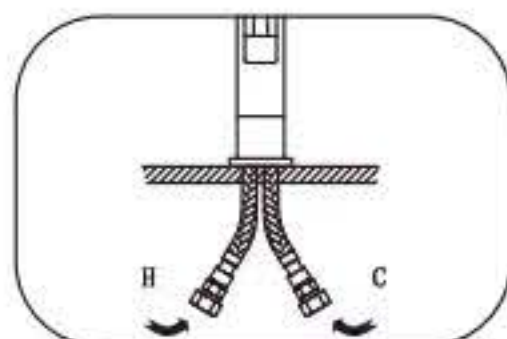

After installation, inspect all connections for leaks.

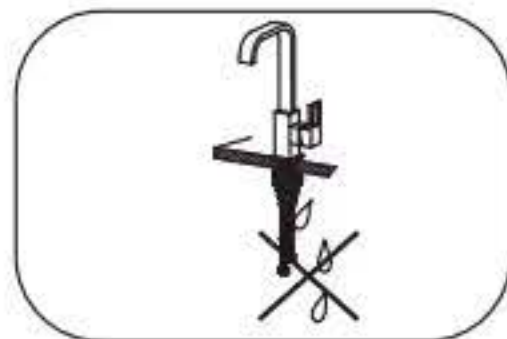


When the room temperature is under 1°C, unscrew the hose adapter and discharge the water in the faucet, otherwise the faucet maybe be broken by ice.

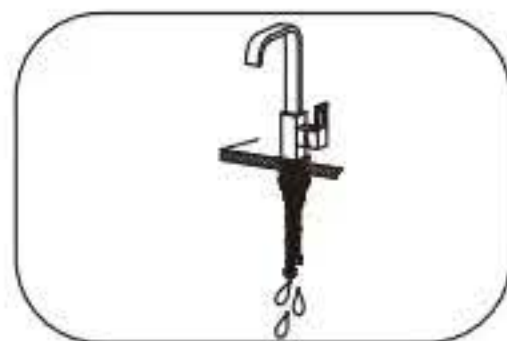

## Installation Method


### ■ Spare parts

| NO. | Designation | Qty.(pcs) |
|-----|-------------|-----------|
| 1   | Faucet body | 1         |
| 2   | Screw stem  | 1         |
| 3   | O-ring      | 1         |
| 4   | Washer      | 2         |
| 5   | Nut         | 1         |
| 6   | Supply hose | 2         |

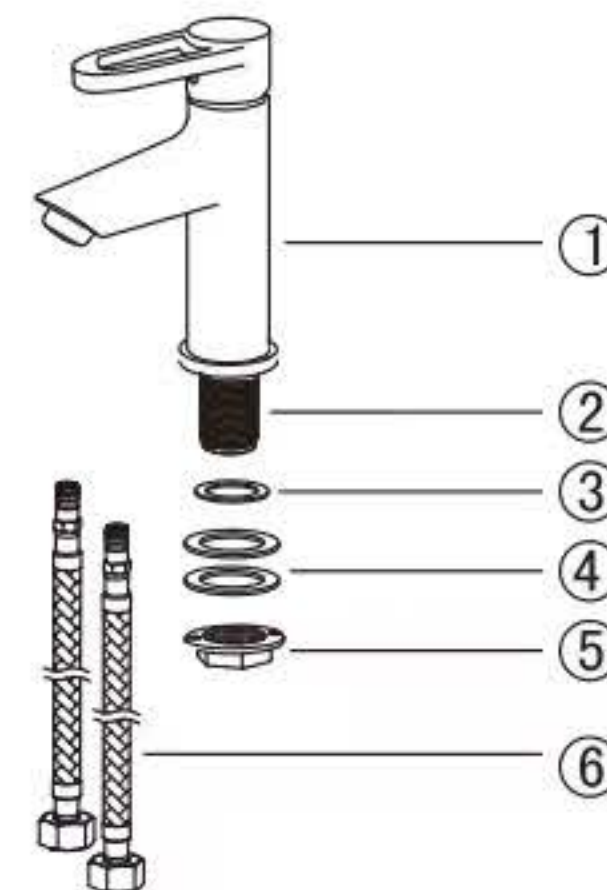

### ■ Installation

1. Drill a 35mm hole on the faucet deck. You can also drill the hole with other size upon request. (See diagram A).
2. Connect the screw stem to the faucet body, install the O-ring onto the screw stem and insert the screw stem through the deck hole. (See diagram B)
3. Install the washer and mounting nut onto the screw stem, tighten the mounting nut. Connect the supply hose to the faucet body. (See diagram C)
4. Connect the supply hoses to the angle valve. Turn off the faucet, turn on the angle value, keep pressure for 30 minutes, inspect all connections for leaks. (See diagram D)

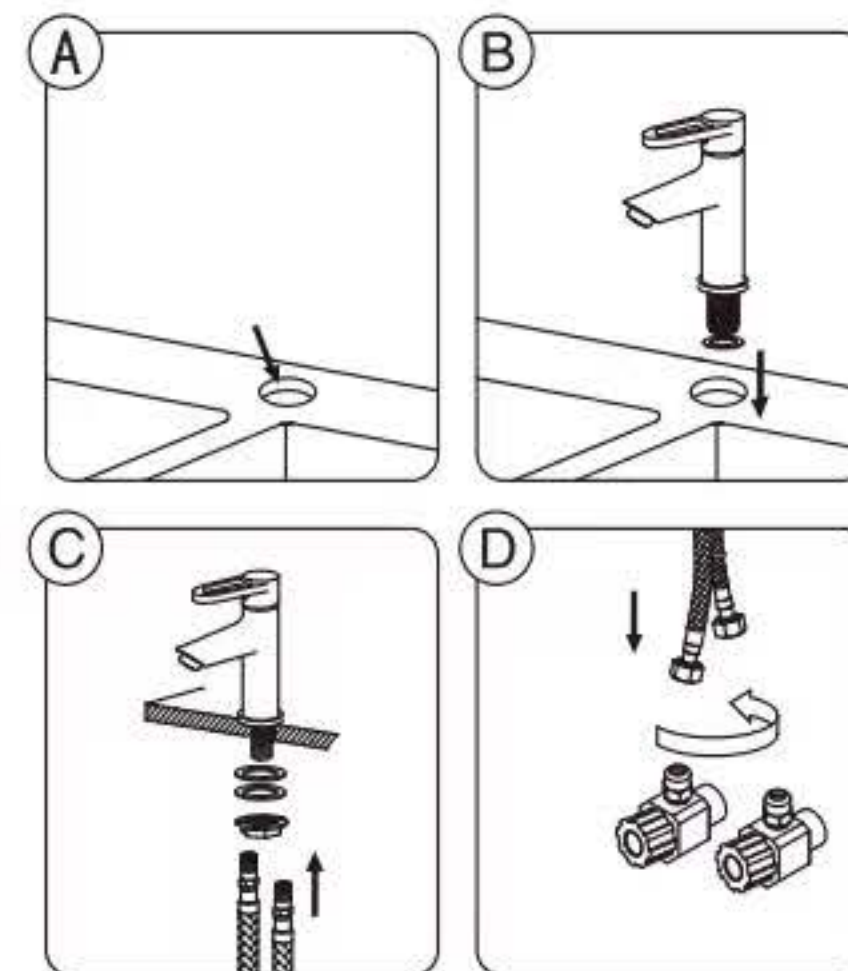

|                                   |                                            |
|-----------------------------------|--------------------------------------------|
| Construction Material (Bathrooms) | Stainless Steel 304                        |
| Flow Rate (L/Min)                 | 9 L/min                                    |
| Hose Supplied                     | Supplied with 1/2" Flexible Tap Connectors |
| Manufacturer Guarantee            | 5 Year Manufacturer's Guarantee(Internal)  |
| Max. Working Pressure             | 5 bar                                      |
| Maximum Bar Pressure              | 5 bar                                      |
| Minimum Bar Pressure              | 0.2 bar                                    |
| Model Name                        | Basin faucet                               |
| Model No                          | RO-H2045                                   |
| Mount Type                        | Deck Mounted                               |
| Pack Size                         | 1                                          |
| Parent Colour                     | Brushed Ti-gold/ Matte black               |
| Pieces in Pack/Case               | 1                                          |
| Pressure Suitability              | Suitable for All Pressure Systems          |
| Product Depth                     | /                                          |
| Product Height                    | 146mm                                      |
| Product Type                      | Basin faucet                               |
| Product Width                     | 168mm                                      |
| Smart Compatibility               | Not Smart                                  |
| Spout Flow Type                   | Standard                                   |
| Tap Control Type                  | Single Control                             |
| Tap Design                        | Modern                                     |
| Tap Handle Type (Bathrooms)       | Lever                                      |
| Tap Product Type (Bathrooms)      | Pillar                                     |

Tap Suitability Type (Bathrooms)

Basin