


Shower Set Model: IN-H4031




All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

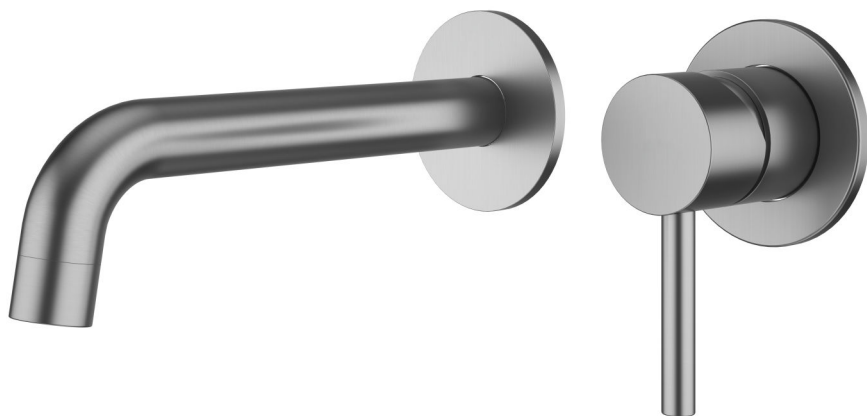


For easy installation of your faucet, please READ ALL the instructions completely before beginning.

Safety Notes


Before installation, please clean out the pipe which will connect to the faucet, or the mud or dirt in the pipe will block the faucet and result in poor water supply. Make sure the output pressure of cold and hot water meet the requirements of faucet.

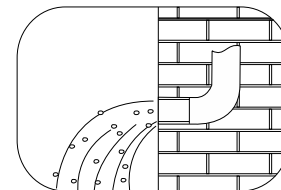


The valve cartridge and other parts of faucet have been justified well by manufacturer, please don't disassemble them by yourself.

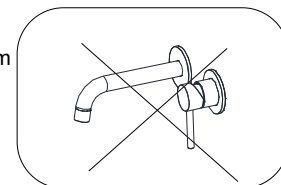


Connect the inlet pipe to the valve body. Ensure that the hot water pipework and cold water pipework are correctly connected hot as per the red and blue markings on the body.

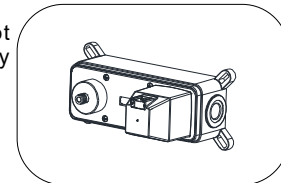

After installation, inspect all connections for leaks.

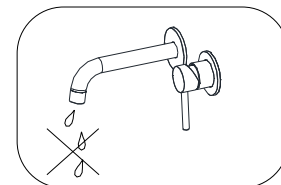


When the room temperature is under 1°C, unscrew the and discharge the water in the faucet, otherwise the faucet maybe be broken by ice.

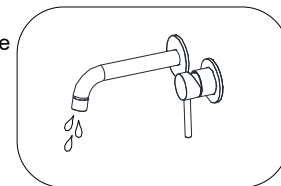

Tapware is to be installed by a Licensed Plumber in accordance with Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c

Installation Instruction For Shower Set

Parts list

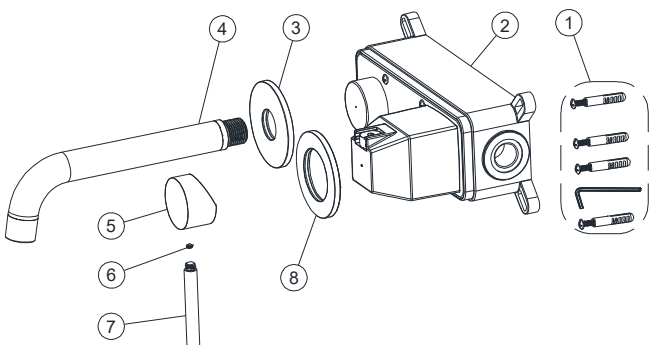

Pos	PartName	Qty
1	Accessory Kit	1
2	Body	1
3	Base	1
4	Spout	1
5	Handle	1
6	Screw	1
7	Handlebar	1
8	Base	1

Installation

1. Drill a 60-65 mm deep square hole in the wall, with a distance of 100 mm between the pre-embedded hole and the outlet, and place the main body into the hole, as shown in Fig. 1.
2. Connect the main body to the inlet pipe and connect the hot and cold water pipes correctly according to the markings on the main body, and then fix the main body in the pre-drilled holes with screws so that it fits the wall and is fixed to the wall; as shown in Fig. 2.
3. Make sure the installation is in the right position.
4. Remove the pre-built body protection cover and prepare for the next step in the installation. As shown in Figure 3.
5. In order to install the connector, panel, outlet, handle cover; as shown in Figure 4.

Fig 1

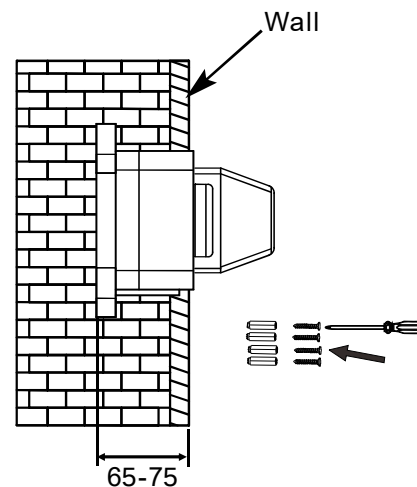


Fig 2

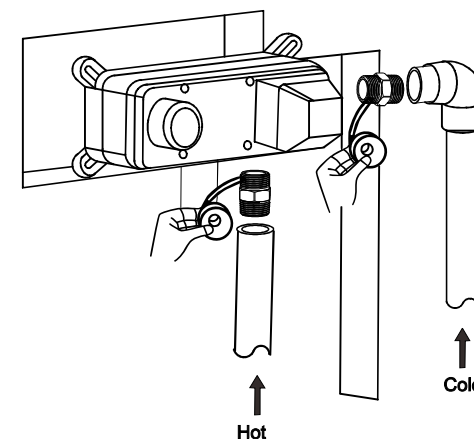


Fig 3

Remove the protective cover and prepare for installation


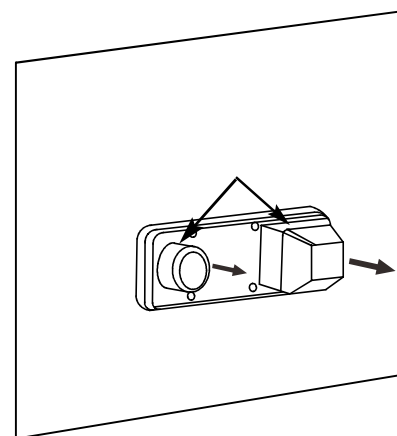


Fig 4

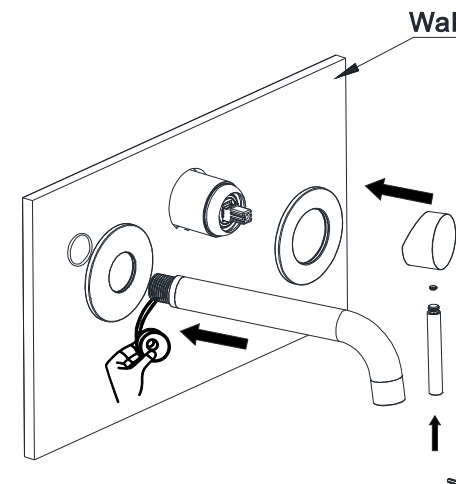

Construction Material (Bathrooms)	Stainless Steel 304
Flow Rate (L/Min)	9 L/min
Hose Supplied	/
Manufacturer Guarantee	5 Year Manufacturer's Guarantee(Internal)
Max. Working Pressure	5 bar
Maximum Bar Pressure	5 bar
Minimum Bar Pressure	0.2 bar
Model Name	Concealed Basin Mixer
Model No	RO-H4031
Mount Type	Wall Mounted
Pack Size	1
Parent Colour	Brushed Ti-gold/ Matte black
Pieces in Pack/Case	1
Pressure Suitability	Suitable for All Pressure Systems
Spout Projection: 200 mm	200mm
Product Type	Basin Mixer
Smart Compatibility	Not Smart
Spout Flow Type	Standard
Tap Control Type	Single Control
Tap Design	Modern
Tap Handle Type (Bathrooms)	Lever
Tap Product Type (Bathrooms)	Concealed Basin Mixer
Tap Suitability Type (Bathrooms)	Basin